


BNC3100-0179

BNC Plug Crimp

75Ω

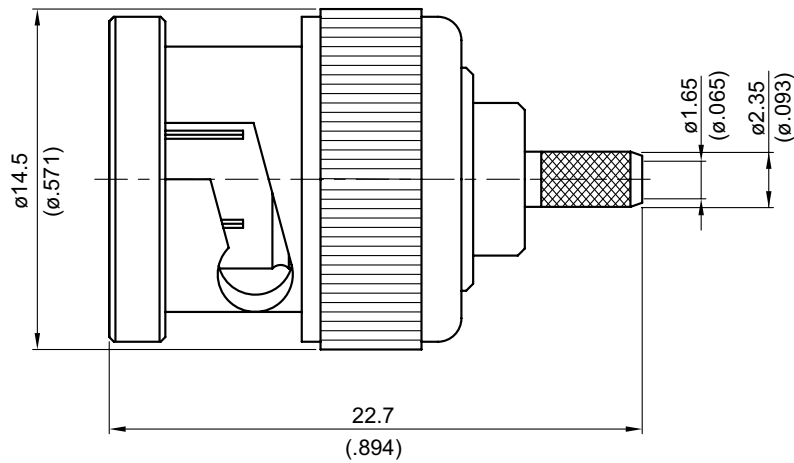

| Parts | Material | Plating (Micro-inch) |
|--------------|----------|--|
| Ferrule | Brass | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |
| Contact Pin | Brass | Gold 3 Over Nickel 50 Over Copper 50 |
| Gasket | Silicone | |
| Washer | Brass | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |
| Spring | SK5 | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |
| Insulator | Teflon | |
| Body | Brass | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |
| Coupling Nut | Brass | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |


Weight: 9.40 g

Suitable Cables: RG179, RG179-FEP

This part number complies with RoHS.

CABLE ASSEMBLY INSTRUCTION

BNC3100-0179

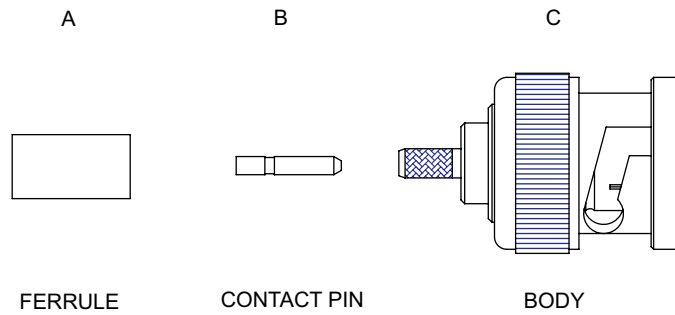

| DIAGRAM | ASSEMBLY INSTRUCTION |
|---------|---|
| | <p>Step 1: STRIP AS SHOWN.</p> |
| | <p>Step 2: SLIDE FERRULE "A" OVER CABLE. Step 3: PUT PIN "B" ON CENTER CONDUCTOR AND CRIMP IN "Y".</p> |
| | <p>Step 4: LOOSEN BRAIDING AND SLIDE CONNECTOR "C" IN PLACE.</p> |
| | <p>Step 5: SLIDE FERRULE "A" TOWARDS THE CONNECTOR AND CRIMP.</p> |

This part number complies with RoHS.