

Part number

CX 08 BM



Brief description:

male insert, 8 poles + shield, shielded connectors, 5A 50V, 0,8kV, 3, for 5A male contacts, modular units series MIXO

Product description

Model	male insert
Version	shielded connectors
Product type	for 5A male contacts
Style	eight contact seats + shield
Family	MIXO series, customizable inserts
N. of poles	8 poles + shield

Technical data

Current	5 A (A.C. and D.C.)
Voltage	50 V
Rated impulse withstand voltage	0,8kV
Pollution degree	3
Operating temperature range (min, max)	-40°C ... +70°C
IP degree of protection	IP20 without enclosure, IP65/IP66/IP68/IP69 with enclosure

Further technical details

Characteristics according to EN 61984	5A 50V 0.8kV 3
Insulation resistance	≥ 10 GΩ
Rated voltage according to UL/CSA	50V
UL 94 flammability rating	V-0
Weight	26,00 g

Approvals / Standards

Reference standard	EN 61984:2009-06
Quality mark	 EAC
Conformity	CQC

General ordering information

EAN13 code	8015747176637
Tariff number	85369095

Packaging Information


Packaging weight	0,30 kg
Packaging description	Carton box
Packaging quantity	10 Pcs
Packaging EAN code	8015747127608
Sub-packaging length	105,00 mm
Sub-packaging height	70,00 mm
Sub-packaging width	110,00 mm
Sub-packaging weight	0,03 kg
Sub-packaging volume	0,81 dm ³
Sub-packaging description	Plastic bag
Sub-packaging quantity	1 Pcs
Sub-packaging EAN barcode	8015747176644

Part number

CX 08 BM



Catalogue drawings

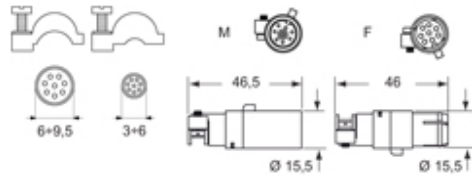

Notes

- characteristics according to EN 61984: 5A 50V 0,8kV 3
- maximum \varnothing of the insulator: 2.4 mm
- for crimp 5A contacts CI series using:
CIPZ D crimping tool
CITP D turret head
CIES insertion / removal tool
- extraction tool for BUS shielded connectors from MIXO BUS insert
part No. CX BES

the modular inserts must be installed in suitable frames which in turn
are installed in traditional housings or COB panel support