

Part number

# CX 08 I6F



## Brief description:

female Gigabit shielded insert, 8 poles, for 5A crimp contacts, 50V, 1 module, modular units MIXO series


Product description		General ordering information	
<b>Model</b>	female insert	<b>EAN13 code</b>	8015747243063
<b>Version</b>	shielded connectors	<b>Packaging Information</b>	
<b>Series</b>	Mixo Gigabit	<b>Packaging length</b>	112,00 mm
<b>Product type</b>	for 5A female contacts	<b>Packaging height</b>	95,00 mm
<b>Family</b>	MIXO series, customizable inserts	<b>Packaging width</b>	117,00 mm
<b>Size</b>	1 module	<b>Packaging weight</b>	0,42 kg
<b>N. of poles</b>	8 poles	<b>Packaging volume</b>	1,24 dm <sup>3</sup>
Technical data		<b>Packaging description</b>	Carton box
<b>Current</b>	5 A (A.C. and D.C.)	<b>Packaging quantity</b>	10 Pcs
<b>Voltage</b>	50 V	<b>Packaging EAN code</b>	8015747243070
<b>Rated impulse withstand voltage</b>	0,8kV	<b>Sub-packaging weight</b>	0,04 kg
<b>Pollution degree</b>	3	<b>Sub-packaging description</b>	Plastic bag
<b>Operating temperature range (min, max)</b>	-40 °C ... +85 °C	<b>Sub-packaging quantity</b>	1 Pcs
<b>Contacts material</b>	Gold plated	<b>Sub-packaging EAN barcode</b>	8015747243087
<b>Mating cycles</b>	≥ 500		
<b>IP degree of protection</b>	IP20 without enclosure, IP65/IP66/IP68/IP69 with enclosure		
Further technical details			
<b>Characteristics according to EN 61984</b>	5A 50V 0,8kV 3		
<b>Insulation resistance</b>	≥ 10 GΩ		
<b>UL 94 flammability rating</b>	V-0		
<b>Weight</b>	41,50 g		

Part number


# CX 08 I6F



## Catalogue drawings

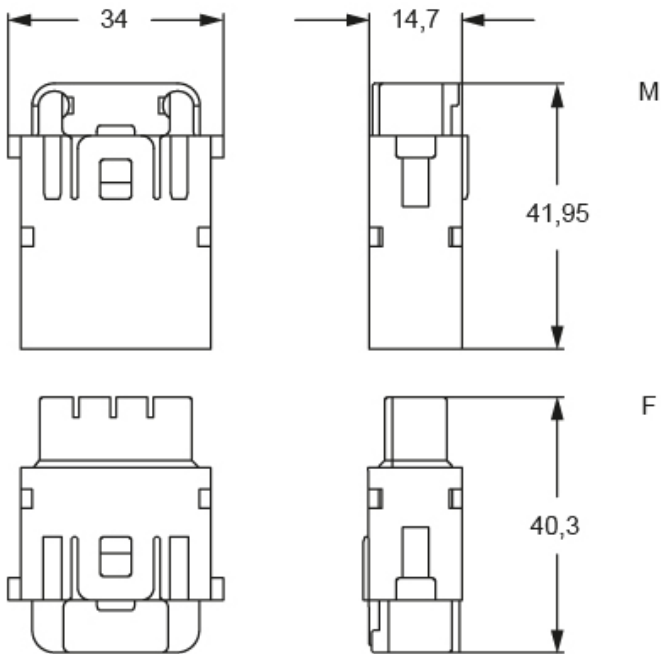

contacts side (front view)  
side with reference arrow ▲

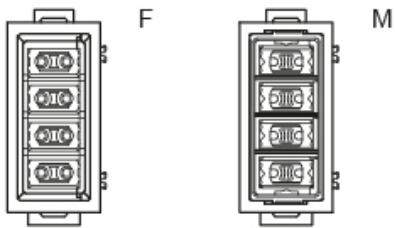

- 1 frame slot

## Notes

the modular inserts must be installed in suitable frames which in turn are installed in traditional housings or COB panel support