

Part number

CX 04 LM



Brief description:

male insert, 4 pole fibre optics, for POF* , MOST*** and coaxial contacts, male inserts for male contacts, 1 module, modular units series MIXO

Product description

Model	male insert
Version	inserts for POF* , MOST*** and coaxial contacts
Product type	male inserts for male contacts
Family	MIXO series, customizable inserts
Size	1 module
N. of poles	4 pole fibre optics

Technical data

Operating temperature range (min, max)	-40°C ... +80°C
---	-----------------

Further technical details

Characteristics according to EN 61984	10A 250V 4kV 3; 10A 230/400V 4kV 2
Insulation resistance	≥ 10 GΩ
Rated voltage according to UL/CSA	50V
UL 94 flammability rating	V-0
Weight	7,00 g

Approvals / Standards

Quality mark	 EAC
Conformity	Not applicable

General ordering information

EAN13 code	8015747172271
Tariff number	85369095

Packaging Information

Packaging length	180,00 mm
Packaging height	130,00 mm
Packaging width	150,00 mm
Packaging weight	2,00 kg
Packaging volume	3,51 dm ³
Packaging description	Carton box
Packaging quantity	60 Pcs
Packaging EAN code	8015747221207
Sub-packaging length	35,00 mm
Sub-packaging height	40,00 mm
Sub-packaging width	155,00 mm
Sub-packaging weight	0,33 kg
Sub-packaging volume	0,22 dm ³
Sub-packaging description	Carton tray
Sub-packaging quantity	10 Pcs
Sub-packaging EAN barcode	8015747172295




Part number

CX 04 LM



Catalogue drawings

CX 04 LF / LM

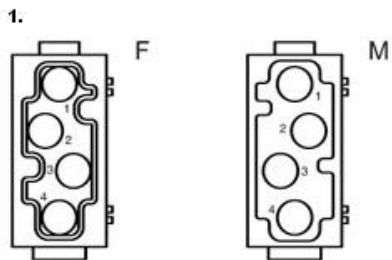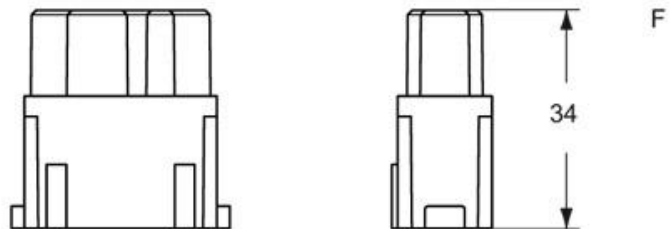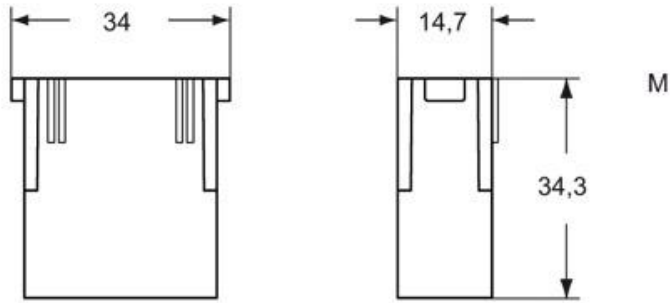

Notes

* POF = Polymer Optical Fibre

*** MOST = Media Oriented System Transport

the modular inserts must be installed in suitable frames which in turn are installed in traditional housings or COB panel support