

Part number

CX 42 DF



Brief description:

female insert, 42 poles, crimp connection, 10 A, 150 V, 2,5 kV, 3, size 2 modules, MIXO modular units

Product description

Model	female insert
Version	Crimp connection
Product type	for female contacts 10A
Family	MIXO series, customizable inserts
Size	2 modules
N. of poles	42 poles

Technical data

Current	10 A (A.C. and D.C.)
Voltage	150 V
Rated impulse withstand voltage	2.5 kV
Pollution degree	3
Operating temperature range (min, max)	-40°C...+125°C
Mating cycles	≥ 500
IP degree of protection	IP20 without enclosure, IP65/IP66/IP68/IP69 with enclosure

Further technical details

Characteristics according to EN 61984	10 A 150 V 2,5 kV 3
Insulation resistance	≥ 10 GΩ
Contact resistance	≤ 3 mΩ
Rated voltage according to UL/CSA	250 V
UL 94 flammability rating	UL 94V-0
Weight	1,00 g

General ordering information

EAN13 code	8015747256230
-------------------	---------------

Packaging Information


Packaging length	112,00 mm
Packaging height	95,00 mm
Packaging width	117,00 mm
Packaging volume	1,24 dm ³
Packaging description	Carton box
Packaging quantity	10 Pcs
Packaging EAN code	8015747256247
Sub-packaging description	Plastic bag
Sub-packaging quantity	1 Pcs
Sub-packaging EAN barcode	8015747256254

Part number

CX 42 DF



Catalogue drawings

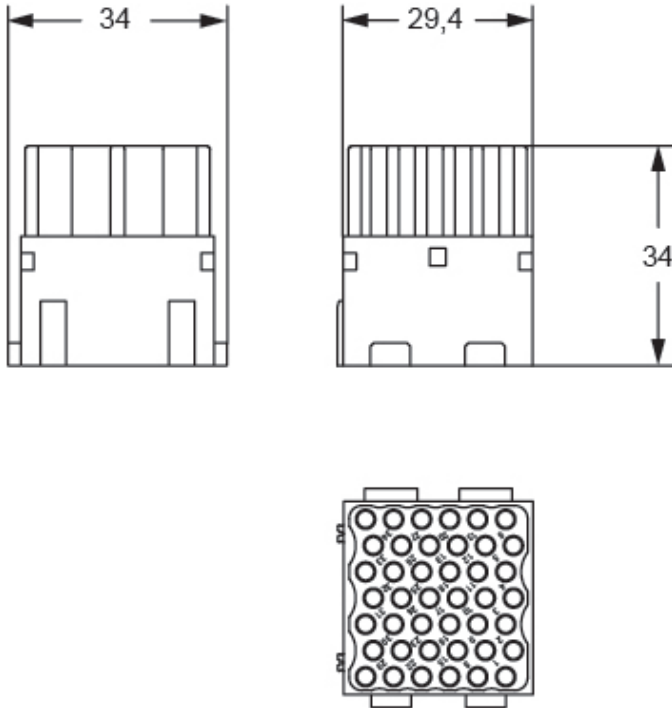

Notes

the modular inserts must be installed in suitable frames which in turn are installed in traditional housings or COB panel support
