


ITEM CODE

**CTSF 40 R**
 Industria Lombarda  
 Materiale Elettrico



Brief description: female insert, 40 poles + PE, with terminal block, spring terminal connection, 10A 250V, 4kV, 3, silver plated, size "57.27" only bulkhead mounted housing, CLASS insert series

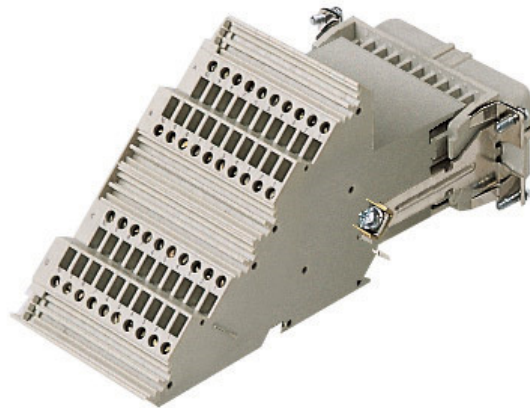

## TECHNICAL DETAILS

### Product description

|                                  |   |
|----------------------------------|---|
| <b>Model</b>                     | Female insert                                   |
| <b>Version</b>                   | With terminal block, spring terminal connection |
| <b>Series</b>                    | CTS   |
| <b>Product type</b>              | With female contacts                            |
| <b>Variant</b>                   | Right side mounting                             |
| <b>Family</b>                    | CLASS inserts, standard version                 |
| <b>Size</b>                      | Size "77.27" only bulkhead mounted housing      |
| <b>N° of poles</b>               | 40 poles + $\oplus$                             |
| <b>Technical data</b>            |   |
| <b>Current</b>                   | 10 A (A.C. and D.C.)                            |
| <b>Tension (V)</b>               | 250 V   |
| <b>Sustained impulse voltage</b> | 4kV   |
| <b>Pollution degree</b>          | 3   |
| <b>Conduct section</b>           | 0,14 mm <sup>2</sup> - 2,50 mm <sup>2</sup>     |

|   |   |
|---|---|
| <b>Dimension Awg</b>                          | 26 - 14   |
| <b>Operating temperature range (min, max)</b> | -40°C ... +125°C  |
| <b>Contact type</b>                           | Silver plated   |
| <b>Plugging cycles</b>                        | ≥ 500   |
| <b>IP degree of protection</b>                | IP20 without enclosure, IP65, IP66, IP67 and IP69K with enclosure                       |
| <b>Other technical details</b>                |   |
| <b>Characteristics according to EN61984</b>   | 10A 250V 4kV 3; 10A 230/400V 4kV 2  |
| <b>Insulation resistance</b>                  | ≥ 10 GΩ   |
| <b>Rated voltage according to UL/CSA</b>      | 600V  |
| <b>UL 94 flammability rating</b>              | V-0   |
| <b>Weight (Kg)</b>                            | 0,34  |
| <b>Approvals / Standards</b>                  |   |
| <b>Reference standard</b>                     | EN 61984 (2001-11)  |
| <b>Quality mark</b>                           |  , EAC |
| <b>Conformity</b>                             |      |
| <b>General ordering information</b>           |   |
| <b>EAN code</b>                               | 8015747041508   |
| <b>Tariff number</b>                          | 85369085  |
| <b>Country of origin</b>                      | Made in EU (IT)   |
| <b>ETIM classification</b>                    | EC000438  |
| <b>Packaging Information</b>                  |   |
| <b>Sub-packaging length (mm)</b>              | 145,00  |
| <b>Sub-packaging height (mm)</b>              | 89,00   |
| <b>Sub-packaging width (mm)</b>               | 90,00   |
| <b>Sub-packaging weight (Kg)</b>              | 0,34  |
| <b>Sub-packaging volume (dm3)</b>             | 1,16  |
| <b>Sub-packaging description</b>              | Carton Box  |
| <b>Sub-packaging quantity (Pcs)</b>           | 1   |
| <b>Sub-packaging EAN code</b>                 | 8015747041515   |

*In order to download a file, right click on a button and select "Save As...":*

## NOTES

Spring terminal connection.

