


ITEM CODE

CNEF 06 TX
 Industria Lombarda
 Materiale Elettrico



Brief description: female insert, 6 poles + PE, screw terminal connections, 16A, 500V, 6kV, 3, silver plated, size "44.27", CLASS insert series

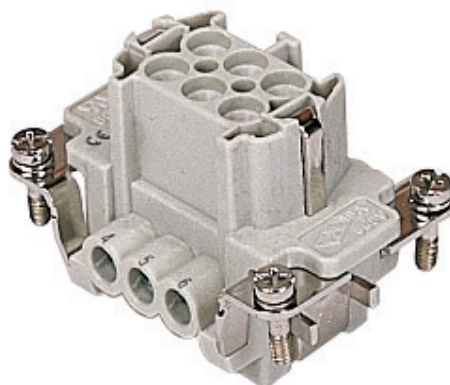

TECHNICAL DETAILS

Product description

Model	Female insert
Version	Screw terminal connections
Series	CNE
Product type	With female contacts
Variant	Without plate
Family	CLASS inserts, standard version
Size	Size "44.27"
N° of poles	6 poles + ⊕
Technical data	
Current	16 A (A.C. and D.C.)
Tension (V)	500 V
Sustained impulse voltage	6kV
Pollution degree	3
Conduct section	0,25 mm ² - 2,50 mm ²

Dimension Awg	24 - 14
Operating temperature range (min, max)	-40°C ... +125°C
Contact type	Silver plated
Plugging cycles	≥ 500
IP degree of protection	IP20 without enclosure; IP65/IP66/IP67/IP68 with enclosure
Stripping length PE connection	7 mm
Other technical details	
Characteristics according to EN61984	16A 500V 6kV 3; 16A 400/690V 6kV 2
Insulation resistance	≥ 10 GΩ
Rated voltage according to UL/CSA	600V
UL 94 flammability rating	V-0
Weight (Kg)	0,06
Approvals / Standards	
Reference standard	EN 61984 (2001-11)
Quality mark	 , EAC
Conformity	
General ordering information	
EAN code	8015747032100
Tariff number	85369085
Country of origin	Made in EU (IT)
ETIM classification	EC000438
Packaging Information	
Packaging length (mm)	210,00
Packaging height (mm)	130,00
Packaging width (mm)	240,00
Packaging weight (Kg)	3,30
Packaging volume (dm3)	6,55
Packaging description	Carton box
Packaging quantity (Pcs)	60
Packaging EAN code	8015747032117
Sub-packaging weight (Kg)	0,55

Sub-packaging description	Carton
Sub-packaging quantity (Pcs)	10
Sub-packaging EAN code	8015747032124

In order to download a file, right click on a button and select "Save As...":

NOTES

CNE ... : for non-prepared conductors



CNE ... X : for conductors with bush terminal
