




Part number
CPF 06

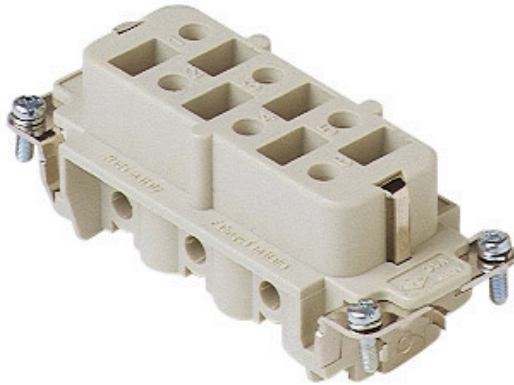

Brief description:

female insert, 6 poles + PE, screw terminal connection, 35A, 400/690V, 6kV, 3, silver plated, size "77.27", CLASS insert series


Product description		Approvals / Standards	
Model	female insert	Reference standard	EN 61984:2009-06
Version	screw terminal connections	Quality mark	 , EAC
Series	CP	Conformity	CQC, CE
Product type	with female contacts	General ordering information	
Family	CLASS inserts	EAN13 code	8015747036788
Size	size "77.27"	Tariff number	85369095
N. of poles	6 poles + 	Country of origin	Made in EU (IT)
Technical data		ETIM classification	EC000438
Current	35 A (A.C. and D.C.)	Packaging Information	
Voltage	400 - 690 V	Packaging length	210,00 mm
Rated impulse withstand voltage	6 kV	Packaging height	200,00 mm
Pollution degree	3	Packaging width	130,00 mm
Wire cross-section	1,50 mm ² - 6,00 mm ²	Packaging weight	2,04 kg
AWG size	16 - 10	Packaging volume	5,46 dm ³
Operating temperature range (min, max)	-40°C ... +125°C	Packaging description	Carton box
Contact type	silver plated	Packaging quantity	20 Pcs
Mating cycles	≥ 500	Packaging EAN code	8015747036795
IP degree of protection	IP20 without enclosure, IP65/IP66/IP68/IP69 with enclosure	Sub-packaging length	87,00 mm
PE terminal stripping length	7 mm	Sub-packaging height	36,00 mm
Further technical details		Sub-packaging width	180,00 mm
Characteristics according to EN 61984	35A 400/690V 6kV 3	Sub-packaging weight	0,51 kg
Insulation resistance	≥ 10 GΩ	Sub-packaging volume	0,56 dm ³
Rated voltage according to UL/CSA	600V	Sub-packaging description	Carton tray
UL 94 flammability rating	V-0	Sub-packaging quantity	5 Pcs
Weight	87,60 g	Sub-packaging EAN barcode	8015747036801

Part number
CPF 06




Catalogue drawings


CPM 06

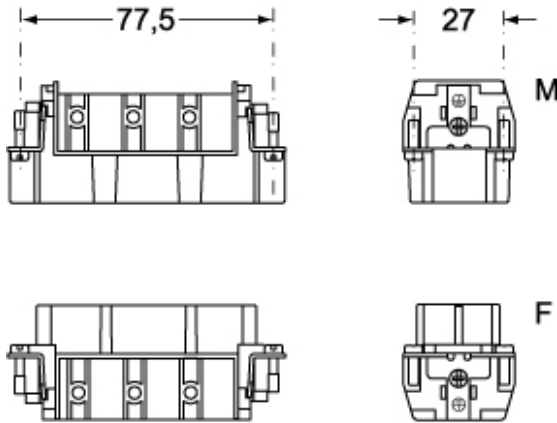

CPF 06



Catalogue drawings

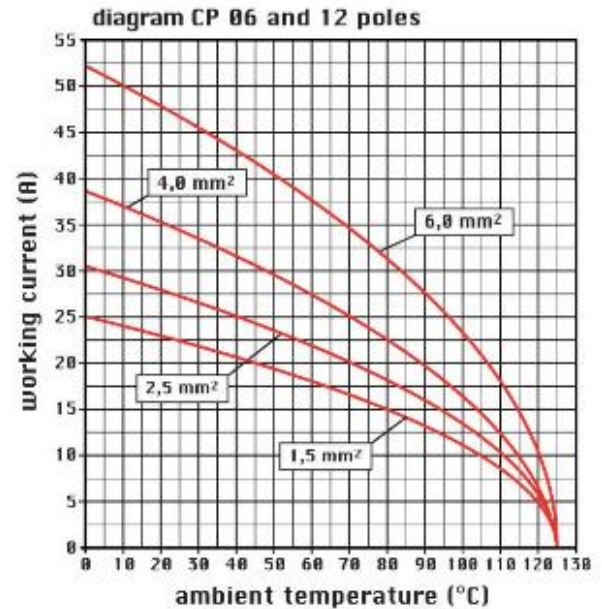

Notes

CPF/M 06 inserts

- characteristics according to EN 61984: 35A 400/690V 6kV 3
- UL, CSA, CCC, GOST certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: > 10 GOhm
- ambient temperature limit: -40 °C ... +125 °C
- are made of self-extinguishing thermoplastic resin UL 94 V0
- mechanical life: > 500 cycles
- contact resistance: < 0,5 mOhm
- inserts with plate, for section conductors: 1,50 ÷ 6 mm² - AWG 16 ÷ 10
- conductors stripping length: 10.5 mm
- terminal screw torque: 1.2 Nm
- enclosures: size 77.27:

C-TYPE IP65/IP66

C7 IP67 stainless steel lever

V-TYPE IP65/IP66 stainless steel lever

T-TYPE IP65 insulating

JEI zinc-plated steel lever

BIG hoods

W-TYPE aggressive environments

EMC

central lever

IP68

- panel supports: COB